


- Commercial Swimming Pool Chemicals & Supplies
- Chlorine for Treatment of Drinking & Waste Water

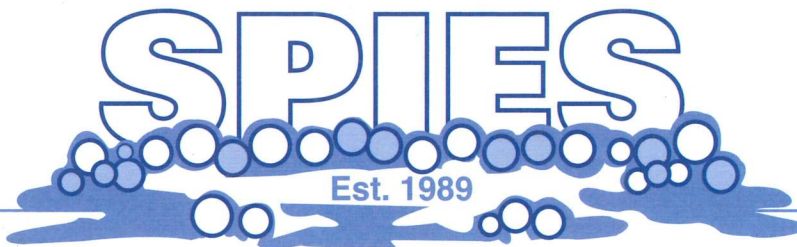

- Parts, Repairs and Renovations
Lic # CP C043205
- Pool Heater Sales and Repair
Lic # 12152

HARMONY SWIM CLUB

3501 HARMONY SQUARE DR. E.
ST. CLOUD, FL. 34773

08/14/17

ATTN: GERHARD, MANAGER

THIS QUOTE IS PER OUR DETAILED INSPECTION OF THE POOL AND DECK AREA TO RESURFACE POOL WITH EXPOSED QUARTZ FINISH. ALSO INCLUDES OPTIONAL EXTRAS FOR TILE, AND LED LIGHTS.

POOL RESURFACING SCOPE OF WORK:

- DRAIN POOL
- CHIP OFF LOOSE AND DELAMINATED MATERIAL UP TO 100 SQ. FT.
- DIAMOND SAW CUT AND BEVEL EXISTING FINISH APPROXIMATELY 1 ½'-2" WIDE, AROUND ALL WALL PENETRATIONS, (INCLUDING LIGHTS, MAIN DRAINS AND RETURN LINE FITTINGS, VACUUM LINES) AND NEXT TO TILE TO PROVIDE FULL DEPTH AND FLUSH INSTALLATION OF THE NEW FINISH
- CHIP AND REMOVE NECESSARY MATERIAL FROM GUTTER TO ACHIEVE ORIGINAL 2" SLOPE FROM THE FRONT TO THE BACK OF THE GUTTER.
- 4,000 PSI PRESSURE WASH ENTIRE POOL SURFACE
- ACID WASH
- INSTALL NEW CONTRASTING SKID RESISTANT STEP TILE ON STEPS (PER STATE CODE 64E-9)
- INSTALL NEW CONTRASTING 4" WIDE RACE LANES IN 2"X2" TILE LIKE EXISTING.
- INSTALL 2 NEW 12" MAIN DRAIN FRAMES AND GRATES PER VGBA
- APPLY BOND KOTE TO PREPARE OLD SURFACE (COVERING FLOOR, WALLS, AND GUTTER)
- RESURFACE POOL WITH SMOOTH, MONOLITHIC LAYER OF EXPOSED QUARTZ FINISH (3/8" TO ½" THICK)
- REMOVE ALL WASTE FROM JOB
- REFILL POOL WITH YOUR WATER, COMPLETELY BALANCE THE WATER CHEMISTRY USING YOUR CHEMICALS, START UP SYSTEM, INSTRUCT YOUR OPERATOR IN THE PROPER TECHNIQUE OF CARING FOR THE NEW FINISH

POOL RESURFACING

- LIMITED 5YR. MANUFACTURER WARRANTY (POOL FINISH ONLY)
ALL OTHER MATERIALS AND LABOR 1 YEAR WARRANTY

TOTAL: \$26,992.00

**801 Sawdust Trail
Kissimmee, FL 34744**



www.spiespool.com

**407-847-2771
Fax 407-847-8242**

- Commercial Swimming Pool Chemicals & Supplies
- Chlorine for Treatment of Drinking & Waste Water



- Parts, Repairs and Renovations
Lic # CP C043205
- Pool Heater Sales and Repair
Lic # 12152

OPTION #1

- RETILE THE WATERLINE. INSTALL NEW 6" X 6" TILE TO ALLOW FOR 2" PITCH FORM THE FRONT TO THE BACK OF THE GUTTER (PER STATE CODE)

\$3,852.00

OPTION #2

- RETILE THE INSIDE BEAM INSTALL NEW 6" X 6" TILE WITH THE NEW DEPTH MARKERS.

\$4,725.00

OPTION #3

- TOP OF BEAM. INSTALL NEW 6"X6" NON SKID DEPTH AND NO DIVING MARKER TILE IN EXISTING LOCATIONS.

\$2,395.00

OPTION #4

- INSTALL 3 NEW LED LIGHTING FIXTURES MANUFACTURER STATES AN 86% ENERGY SAVINGS

\$2,285.00

****NOTE:** ANY PVC FITTINGS WHICH WE FIND CANNOT BE REUSED WILL BE BILLED FOR SEPARATELY.

THE POOL DECK AREA WILL NEED TO BE CLOSED WHILE THE REFINISHING IS BEING DONE. THE WORK WILL TAKE 7-10 WORKING DAYS DEPENDING UPON OPTIONS CHOSEN, WEATHER AND GROUNDWATER CONDITIONS PERMITTING. WE DO REQUIRE A PAYMENT SCHEDULE WITH A 50% DEPOSIT DUE UPON RECEIVING A COPY OF THE SIGNED CONTRACT AND THE REMAINING 50% DUE UPON COMPLETION AND SUBMITTAL OF OUR FINAL INVOICE. PLEASE HAVE AN AUTHORIZED PERSON SIGN THE QUOTE; RETURN AN EXECUTED SET TO US FOR CONVENIENT SCHEDULING OF THE WORK. IF YOU HAVE ANY QUESTIONS, PLEASE FEEL FREE TO CALL ME.

AGREED AND ACCEPTED:

REGARDS,

NAME _____

TITLE _____

DATE _____

OPTION #1 _____ OPTION #2 _____

OPTION #3 _____ OPTION #4 _____

DEREK SCHWAN
PROJECT MANAGER
SPIES POOL LLC
CP C043205

**801 Sawdust Trail
Kissimmee, FL 34744**



www.spiespool.com

**407-847-2771
Fax 407-847-8242**